PD140N

NEW GENERATION COMPACT HAND HELD METAL DETECTION SET

FEATURES

- NIJ Standard 0602.02 Compliant
- Compact, Elegant, Robust and Ergonomic
- Uniform Detection of Magnetic and Non-Magnetic Targets
- Full Digital Design: Consistent Performance and Calibration-Free Operations
- Extended Continuous Operation Time
- Advanced Configuration Capability
- Indoor and Outdoor Operations



PD140N Hand Held Detection Set with carry bag



@Bis /



Tel.: +39 0575 4181 Fax: +39 0575 418298 e-mail: infosecurity@ceia-spa.com

www.ceia.net

The **PD140N** is a Hand Held Metal Detector that combines high reliability and ergonomics with advanced detection and operator signaling features.

Effective sensitivity to all metals, full compliance with the latest Security Standards and high immunity to external metal masses are among the main peculiarities of this new device.

Advantages & Benefits

- Programmable Sensitivity
- Extended Continuous Operation Time
- Automatic Low Power Mode during Screening Pauses
- Embedded Long Life Rechargeable
 Batteries are renewable energy and wipe
 out Operation Cost of Alkaline Batteries
- Embedded Fast and Reliable Battery Charger: no need of batteries removal
- Dedicated Holder acts as Minimum Space Table Stand and Mains connection for Battery Charge
- Operator Functions can be standard or customized by the user through PC GUI and USB connection




☑ COMPACT ELEGANT, ROBUST AND ERGONOMIC

The PD140N features a special ergonomic design consisting of an offset hand grip which ensures that the operator's hand does not interfere with the sensitive detection area. This means fewer scans per person and therefore shorter inspection times per person.

Special care has gone into the mechanical design of the detector. Absence of sharp edges or corners allows the detector to be passed smoothly over the inspected area without getting caught in buttons, buckles, folds or other parts of clothing.



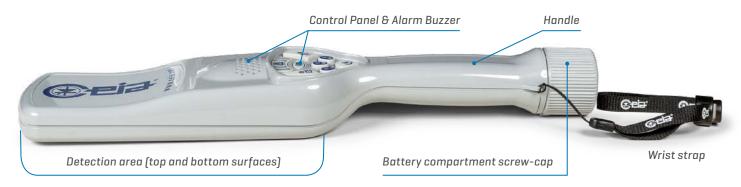



▼ NIJ STANDARD 0602.02 COMPLIANT

The technical features of the detector comply with the NIJ standard 0602.02 and the new NIJ draft standard 0602.03. The PD140N has uniform sensitivity to magnetic and non-magnetic targets including those made of stainless steel. At the same time the detector offers excellent body-effect compensation and has high **immunity** to external disturbance from electromagnetic and mechanical sources.

▼ FULL DIGITAL DESIGN

The PD140N is fully digital. Electronic functions include a inspection field transmitter-receiver based on Digital Signal Processing (DSP) technology, a digital operator interface and external communications over the incorporated USB port. This design combined with a special printed antenna ensures top reliability and very high repeatability.

✓ ADVANCED CONTROL PANEL

The control panel with switches and warning lights is made from high-thickness silicon guaranteeing high degree of protection to make the PD140N suitable for indoor and outdoor use.

✓ EXTENDED CONTINUOUS OPERATION TIME

The PD140N metal detector is powered by two AA-size NiMH batteries with a battery life of over 100 hours. A Low Power Mode is automatically activated during pauses, extending the battery life up to 200 hours. An internal circuit optimizes battery recharging which takes less than five hours.

✓ LATEST PLASTIC MATERIALS TECHNOLOGY

The metal detector casing is made from next-generation technical polymers. These plastics offer high chemical resistance and mechanical strength ensuring a long detector life even in heavy duty conditions.

■ ADVANCED CONFIGURATION CAPABILITY

The digital design of the new metal detector also enables the maximum flexibility in selecting the functions available to the user and how detection alarms are signalled. Users can keep the factory settings or connect the detector over its USB to a PC and then personalize the settings with a dedicated graphic interface [HHMD configuration tool required).

FULLY PROGRAMMABLE SIGNALLING

- Proportional/Fixed, High Loudness Acoustic Alarm
- Proportional/Fixed, High Brightness Optical Alarm
- · Vibration Alarm for Discrete Screening



Α Power push button

B C Alarm Mode selection

Sensitivity selection: DEF • Low • Medium • High

G Alarm indicator н

Battery charge indicator



Optical indication proportional to the metal signal strength (Low, Medium, High).



regulations



Specifications

POWER SUPPLY	2x AA size NiMH, rechargeable batteries	
FULLY CUSTOMIZABLE CONTROL PANEL	Optical, acoustic and vibration alarm modes	
	3-level sensitivity selection buttons	
DETECTION AND OPERATIONAL FUNCTIONS	Customizable	via HHMD Configuration tool
BATTERY	Battery life	100 + hours continuous service (AA NiMH batteries 2500 mAh); up to 200 hours with automatic sleep mode
	Low battery indicator	
	Built-in fast ba	attery charger in combination with the HHDS Docking station
OPERATING TEMPERATURE	-40°C to 70°C	
STORAGE TEMPERATURE	-40°C to 80°C	
RELATIVE HUMIDITY	0 to 98% (without condensation)	
DIMENSIONS	PD140N: 360 mm x 80 mm x 40 mm	
	HHDS Docking station: 175 mm x 115 mm x 85 mm	
	Carry Bag: 430 mm x 340 mm x 105 mm	
WEIGHT	PD140N (with battery): 390 g	
	HHDS Docking station for PD140N (whit power adapter): 755 g	
	Carry Bag: 1,3 kg	
COLOR	PD140N: light grey RAL 7040 - Carry Bag: Green RAL 7013	
MANUFACTURED IN GREY SH	OCK-RESISTANT TI	ECHNICAL POLYMERS
COMPLIANCE	NIJ 0602.02 aı	nd NIJ 0602.03 (draft) Standards for metal detection

	PD140N A CHIEF TO THE POSSON P	
	9 8	
1		
	5 6 3 2	
1		

International Standards currently applicable for safety, EMC and applicable CE

Ordering Code				
PD140N-SET				
Shipping Information				
Dimensions (mm)	425 x 220 x 110 (WxDxH)			
Weight	2 kg			
Part List				
1 PD140N Hand	PD140N Hand Held Metal Detector			
2 HHDS Docking	HHDS Docking station			
3 Coupling pins	Coupling pins for side-by-side			
docking statio	docking station placement			
4 NIJ compliant	NIJ compliant Calibration Test Piece			
5 Universal AC a	Universal AC adapter			
(100-240 Vac	, 50-60Hz, 6W)			
6 US, EU, UK, JP	US, EU, UK, JP plugs adapter			
7 Wrist strap	Wrist strap			
8 Instruction ma	Instruction manual			
9 Quick Referen	ce Guide			

Applications

- ✓ Airports
- ✓ Correctional Facilities
- ✓ Law Enforcement
- ✓ Government Buildings
- ✓ Nuclear Facilities
- ✓ Loss Prevention
- ✓ Public Events
- ✓ Schools Security

PD140N-Set

Accessories

Carry Bag

(ordering code: 64081)

The carry bag does not include parts inside





NIJ 0602.02 Test Pieces Kit

Includes 11 test objects for LO, MO, SO, VSO security levels. Test pieces are manufactured according to NIJ 0602.02 specifications and electromagnetically certified.

[ordering code: NIJ-HHMD-0602.02]



HHMD Configuration tool

Allows the connection of the Metal Detector to PC, via USB port. Includes special USB adapter with cable, GUI application software, tool for battery cap removal.





Cigarette lighter cable for battery charger

(ordering code: 64436)



HHDS-5: Five Hand Held Metal Detector docking station

FEATURES

- Simultaneous charge of multiple HHMDs
- Single mains socket installation
- Minimum space requirement
- Monolithic, high mechanical stability

APPLICATIONS

- Public Events
- Stadiums and Sport Arenas
- Conventions
- Multiple lane screening



€ela|



Ordering Code				
HHDS-5				
Equipment Information				
Power supply	100-240 VAC, 50-60Hz, 30W			
Dimensions (mm)	635 x 72 (WxH)			
Shipping information				
Dimensions (mm)	710 x 350 x 110 (WxDxH)			
Weight	3,3 kg			
Part List				
Docking station base				
2 Universal AC adapter				
3 US, EU, UK, JP plugs adapter				
4 Quick Reference Guide				



ZONA INDUSTRIALE 54/G, 52041 VICIOMAGGIO - AREZZO (ITALY)
Tel.: +39 0575 4181 Fax: +39 0575 418298 E-mail: infosecurity@ceia-spa.com